

Anglia Composites Ltd

COMPOSITE SAFETY SOLUTIONS

SAFETY GATES


All gates are double bar gates to conform to EN-ISO 14122 part 3:2001 and part 4:2005. Our corrosion resistant gates are self closing and have a knee rail and a handrail. All gates are shipped fully assembled including attachment. Double bar gates only need one hinge. If you are fixing to a tubular post order next size up to allow for fixing plate. (please ask for details)

<u>Opening</u>	<u>Item No.</u>
Up to 555mm	22L or 22R
556-685mm	27L or 27R
686-810mm	32L or 32R
811-940mm	37L or 37R



SAFETY GATE INSTALLATION INSTRUCTIONS

- Make sure the blades of the gate are long enough to contact and extend past opposite side guardrail post by 25mm minimum.
- The support block is mounted below the top rail of the gate to prevent vertical deflection. It should not make contact with the gate or interfere with it opening or closing.
- The top rail of the gate should be no more than 1100mm above platform surface.
- If the gate is to be attached to a tubular handrail it will be necessary to weld or bolt a plate to the inside top corners to accept the hinge and support block.

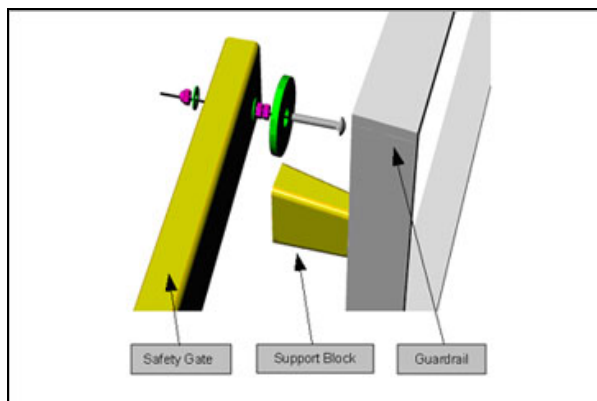

Magnetic 'HOLDTIGHT' kit available as optional extra

